

WOODS

MULTI-SPINDLE ROTARY CUTTERS



Durable and easy-to-use cutters for both
brush cutting and crop shredding applications

Multi-Spindle Rotary Cutters

Table of Contents

Standard-Duty, Dual-Spindles	3
DS96	
MDS96	
DS120	
MDS120	
Heavy-Duty, Dual- and Triple-Spindles	4
Dual-Spindle Series	4
DS1260	
MDS1260	
DS1440	
MDS1440	
Offset Dual-Spindle	5
DSO126	
Triple-Spindle Series	5
TS1680	
MTS1680	
Belt-Driven Dual-Spindle D80 Series	5
D80	
MD80	
DO80	
MDO80	
Specifications Chart	6

More than a dozen gear- and belt-driven models



DS96
shown with optional chain shielding

Legend

Standard Duty

Designed and manufactured for typical usage and basic applications.

Medium Duty

Designed and manufactured for harsher usage and tougher applications.

Heavy Duty

Designed and manufactured for extreme usage and the most demanding applications.



Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.



Maintain the quality and performance of your Woods equipment with WoodsCare genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.

Easy to Use

The proven leader in the cutter business delivers a full line of easy-to-use standard- and heavy-duty rotary cutters for every application.

- You'll cross steep inclines and ditches with ease as the improved floating hitch keeps the weight off the cutter.
- Switch cutting blades quickly and you'll be up and running in no time due to the large blade access window and the exclusive Woods Quick Change Blade Pin System.
- Change over to row crop applications in an instant with quick-adjust variable wheel spacing (not applicable on DS96).

Hard to Break

You'll rely on your Woods rotary cutter for years because we still manufacture them with the same dependable quality that we've built in since 1946.

- Woods gearboxes feature heat-treated, alloy steel gears that stand up to the demands of rotary cutting.
- Sloped-top decks shed water and debris to prevent rust and corrosion and wrap around a heavy steel superstructure.
- Spring cushion axles reduce stress spikes to keep your Woods rotary cutter delivering high-performance cutting (not applicable on DS96).

Standard-Duty Dual-Spindles

Models

DS96	96-inch, Pull Type
MDS96	96-inch, 3-Point Mounted
DS120	120-inch, Pull Type
MDS120	120-inch, 3-Point Mounted

Tractor range: 35–120 hp

- Cuts light brush up to 1.5-inches in diameter
- Variable wheel spacing
- Six-year limited gearbox warranty



DS120 shown with optional chain shielding

Multi-Spindle Rotary Cutters

Heavy-Duty Dual-Spindles

Models

DS1260	126-inch, Pull Type
MDS1260	126-inch, 3-Point Mounted
DS1440	144-inch, Pull Type
MDS1440	144-inch, 3-Point Mounted

Tractor range: 50–200 hp

- Cuts brush up to 3-inches in diameter
- Variable wheel spacing
- Ten-year deck rust-through warranty
- Six-year limited gearbox warranty

Bolt-on Skid Shoes

Skid shoes run the full length and are replaceable

Large Access Window


Large blade access window for easy maintenance


Sloped Top Deck

Smooth, sloped deck sheds water and debris to prevent rust and corrosion

DS1260

shown with optional chain shielding

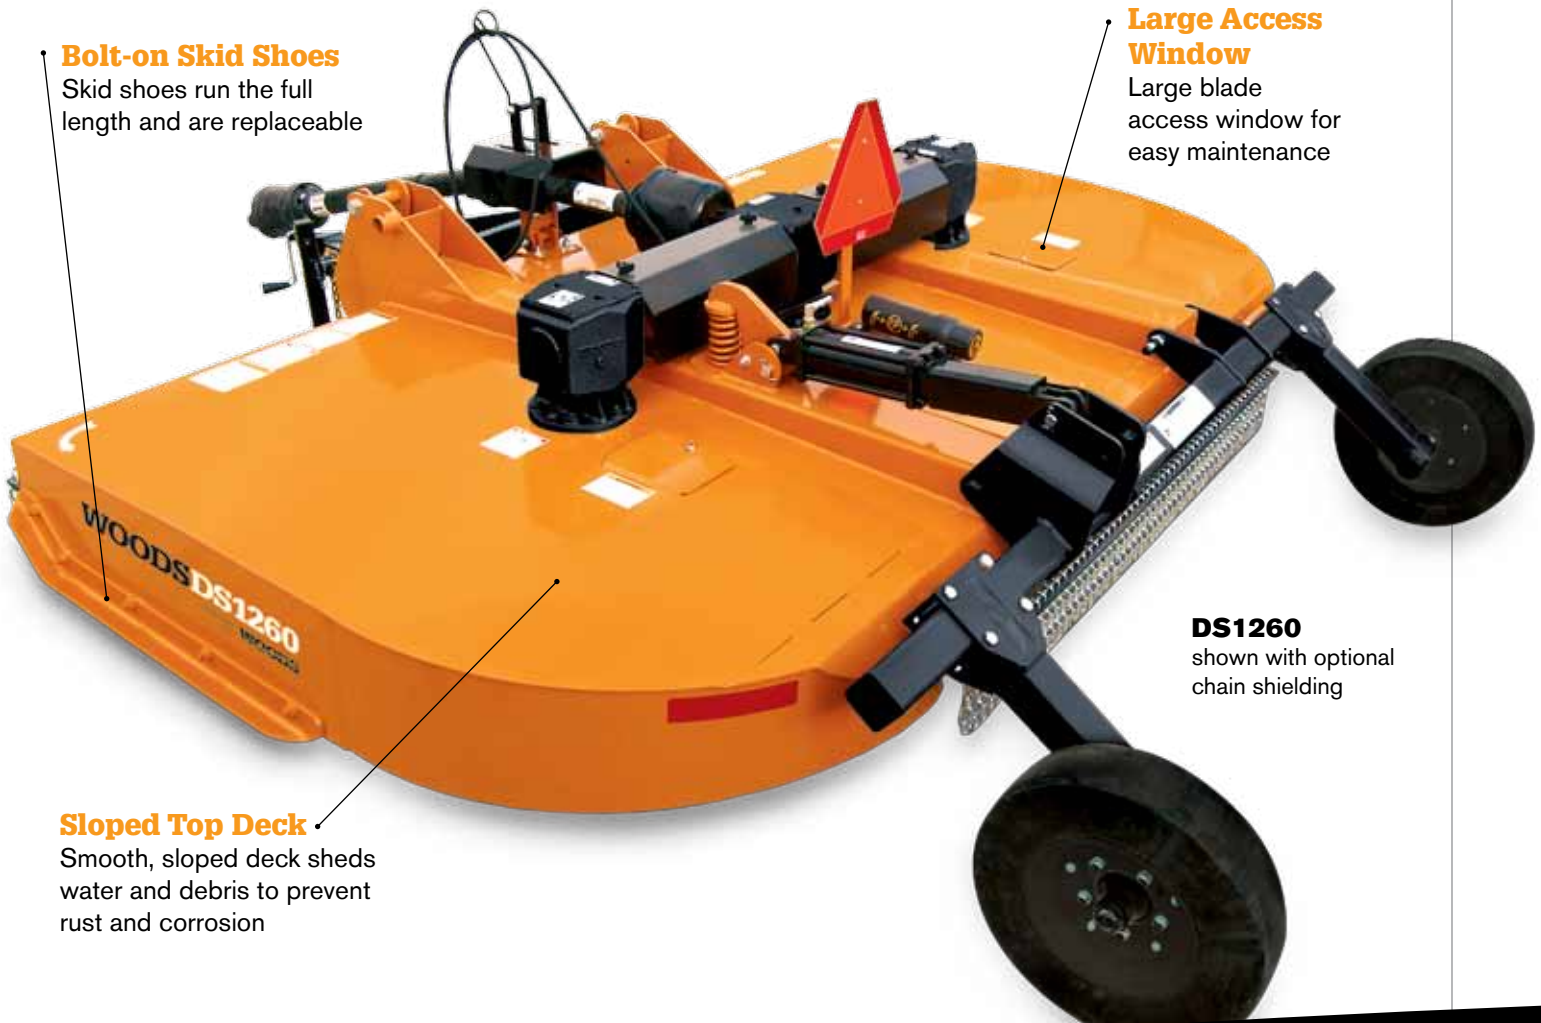

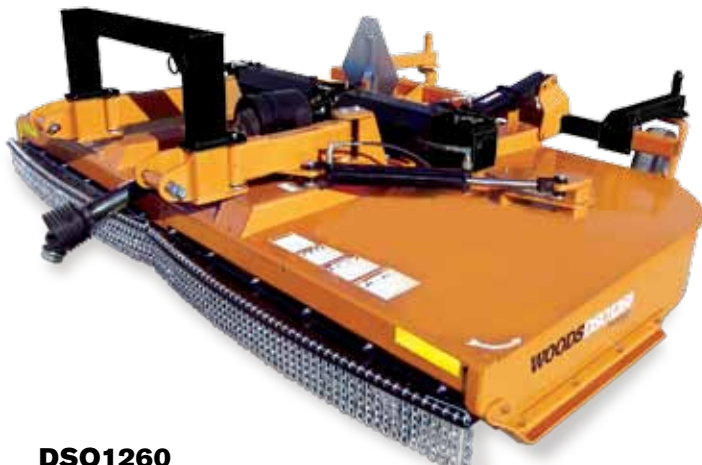

DSO1260
shown with optional chain shielding

Heavy-Duty Offset Dual-Spindles

Tractor range: 50–200 hp

Model
DSO126 126-inch, Offset

- Cuts brush up to 3-inches in diameter
- Variable wheel spacing
- Sixteen-inch hydraulic variable offset to the right or left
- Ten-year deck rust-through warranty
- Six-year limited gearbox warranty

Heavy-Duty Triple-Spindles

Tractor range: 70–230 hp

Triple Spindle Models

TS1680 168-inch
MTS1680 168-inch

- Optional shredding kit for corn, cotton and milo
- Standard high-torque drive train and baffles
- Variable wheel spacing
- Ten-year deck rust-through warranty
- Six-year limited gearbox warranty



MTS1680 shown with optional chain shielding



D80 shown with optional chain shielding

Belt-Driven D80 Series Dual-Spindles

Models
D80 Pull Type
MD80 Mounted
DO80 Pull Type
MDO80 Mounted

- Seven gauge frame and sides, 11 gauge deck, welded box-type construction for rugged service
- Custom designed gearbox with forged gears, heat treated for extra strength
- Blade spindles with lubricated, adjustable tapered roller-bearings for long life

Multi-Spindle Rotary Cutters

Specifications Chart

Specifications	DS96 (pull-type) MDS96 (3-point mounted)	DS120 (pull-type) MDS120 (3-point mounted)	DS1260 (pull-type) MDS1260 (3-point mounted)
Minimum tractor HP	35 hp	40 hp	50 hp pull, semi-mounted; 65 hp mounted
Hitch category / type	pull-type, Cat 2 / clevis		pull-type, Cat 2 or 3 / clevis, semi-mounted
Cutting width	96"	120"	126"
Cutting height range	2–12"		2–13"
Cutting capacity	1.5"		3"
Gearbox horsepower rating	120 hp splitter; 90 hp spindle		205 hp splitter; 160 hp blade spindle
Gearbox warranty	6-years		6-years
Blade tip speed (540 RPM)	15,900 fpm	16,700 fpm	540 rpm / 16,881 fpm; 1,000 rpm / 17,016 fpm
Deck side depth	10"	11"	12.6"
Approximate weight	1,620 lbs	2,100 lbs	2,643 lbs
Blade dimensions	.38" x 4"	.5" x 4"	
Side skirt thickness	7 gauge		.25"
Wheel selection	laminated, used aircraft, foam-filled aircraft, or 15" pneumatic		
Optional dual wheels – pull-type	yes		
Quick-hitch compatible	yes		
	Standard Duty		

DS1440 (pull-type) MDS1440 (3-point mounted)	DSO1260 (offset, semi-mount)	MTS1680 (pull-type) TS1680 (3-point mounted)	D80 (pull-type) MD80 (3-point mounted)	DO80 (pull-type) MDO80 (3-point mounted)
50 hp pull, semi-mounted; 70 hp mounted	50 hp pull type	70 hp pull type 90 hp with front weight mounted	25 hp pull-type 40 hp mounted	35 hp pull-type 40 hp mounted
pull-type, Cat 2 or 3 / clevis, semi-mounted	Cat 2 or 3 / clevis, semi-mounted	Cat 2 or 3 / clevis	pull-type, Cat 1 / cantilevered	
144"	126"	168"	80"	
2-13"	2-13"	2-13"	2-12"	2-12"
3"			1"	
205 hp splitter; 160 hp blade spindle	205 hp splitter; 160 hp blade spindle	235 hp splitter; 205 hp blade spindle	60 hp	
6-years			1-year	
540 rpm / 16,240 fpm; 1,000 rpm / 16,487 fpm	540 rpm / 16,881 fpm 1,000 rpm / 17,016 fpm	15,540 fpm	13,920 fpm	13,920 fpm
12.6"		12.4"	9.4"	
3,062 lbs	2,725 lbs	3,730 lbs	1,430 / 1200 lbs	1,450 / 1220 lbs
.5" x 4"			.38" x 3"	
.25"			7 gauge	
laminated, used aircraft, foam-filled aircraft, or 15" pneumatic	21" laminated	laminated, used aircraft, foam-filled aircraft, or 15" pneumatic		
yes	no	yes	no	
yes	-	yes	-	
Heavy Duty			Belt Driven	

Woods Equipment A Blount International Company
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals.
©2012 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.



B04091 Revised April 2012



Printed in the USA with soy ink on paper using recycled content